

**SWF TRAY-MATIC® Tray Former
TF 400V**



Key Features

- Up to 60 trays per minute (depending on size and style)
- Small footprint
- Portable
- Forms hundreds of tray designs
- Rugged, 24/7 construction
- Simple operator interface
- PLC controls
- Polycarbonate inerlocked guard package
- Thousands of Thiele/SWF installations worldwide
- Backed by a world-class service team

SWF TRAY-MATIC® Tray Former

TF 400V

The TF 400V Tray Former constructs a one piece tray. Tray designs can be a very economical way to package your product. Design variations such as top flaps, diagonal corner, and display features can provide a unique and cost effective solution. Standard machine range dimensions are shown to the right.

The SWF line of bliss and tray formers dates back to the 1940's. With an install base of more than 5,000 machines worldwide, this versatile equipment can form hundreds of different styles of tray and bliss cases. Featuring a small footprint, these ruggedly built machines require little floor space and are easily moved on their casters or by fork lift to accommodate plant changes as necessary. With mechanical simplicity and durability as a primary focus, long life cycles are common among our installations.


Optional Features

- High capacity hoppers - fit various production needs
- Kwik-change features - reduce change-over time
- Various glue systems - pressurized, mechanical, cold
- Large capacity glue systems - to reduce filling intervals
- Automatic HSC lidding attachment - inserts formed tray into HSC cover
- Servo driven mandrel - allows intermittent folding sequence


Additional Options

- Operator and material staging platform
- Corrosion resistant packages
- Automatic stacking system for trays
- Roll-over mechanism to create display windows
- Discharge conveyors


TF 400V Standard

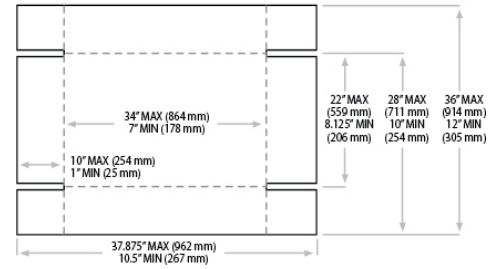


TF 400VK Kwik-Change

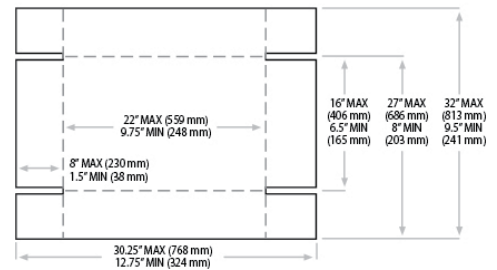


TF 600VK Kwik-Change

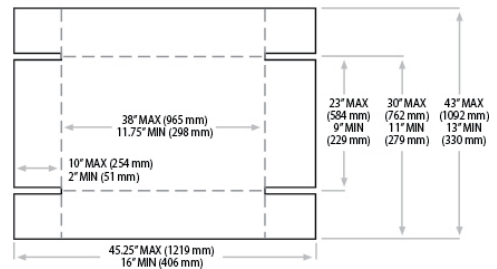

TF 600V Wide Base

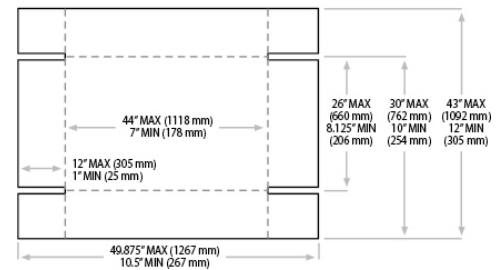

Dimensions specified are preliminary only and may vary depending on box size; please add 12" for wide-base model

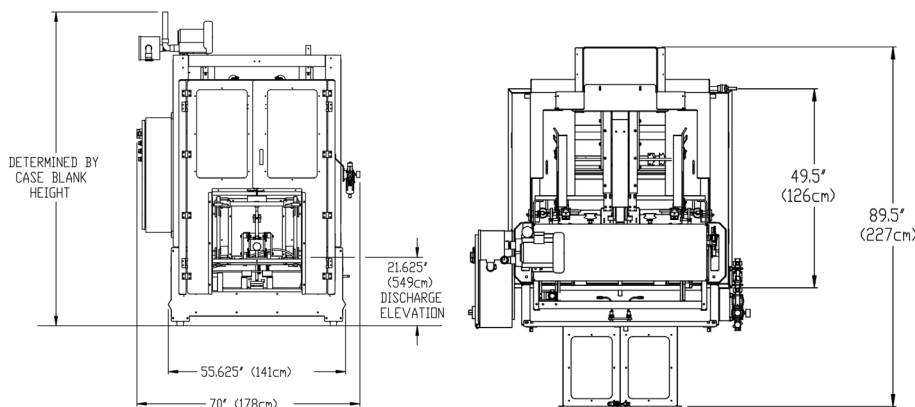

All sales are subject to our prevailing terms and conditions. Illustrations and specifications are subject to change without notice. Machines shown without guards are for illustrative purposes only. Guards are supplied and must be in place before operation.