

## Servo Can Packer



### Standard Features:

- Ideal for club store packaging of canned products including fruits, vegetables, soups and petfood
- Servo driven packer eliminates mechanical drive for enhanced performance and uptime
- Barrel cam loader for precise product loading
- Starwheel infeed for handling cans, PET bottles, and glass bottles (other infeeds are available)
- High-speed rotary carton set-up for single layer or corrugated fiberboard cartons
- Speeds up to 2,200 cans per minute
- Handles a variety of sizes (from 4 packs to 24 packs)
- Electronic changeover on the infeed to develop different pack patterns

# Barry-Wehmiller

ACCRAPLY

Barry-Wehmiller  
International Resources

Barry-Wehmiller  
Company

MarquipWardUnited

HavssenSandiacre

DESIGN GROUP



Thiele

Technologies

FleetwoodGoldcoWyard

pneumatic  
SC&E



# Servo Can Packer

The Thiele Servo Can Packer is the latest Thiele Technologies design that incorporates state-of-the-art servos and HMI interfacing. This ruggedly designed can packer has the flexibility of handling various products and pack patterns for the ever changing Club Store Industry.

With Thiele's product infeed design, product is oriented into the pack pattern without damage such as scratches or dents. Specially engineered carton set-up efficiently erects and places even the most difficult carton styles whether single-layer or corrugated fiberboard.



## Specifications

### SPEED

Variable up to 175 cartons per minute depending on pack pattern. 2200 cans per minute

### CARTON SIZE RANGE

Length	4 1/8 " to 10 1/2"	Length & Depth capabilities dependent upon your product matrix.
Width	3" to 6"	
Depth	4 1/8 " to 15 1/2"	

### DRIVE

Multi-axis servo

### INFEEDS

Bottles or cans utilizing servo starwheels & conveyors

### MAGAZINE CAPACITY

4 ft. powered hopper standard – 8 ft. available optionally

### CARTON SET-UP

4-head rotary, gear driven

### GLUE SYSTEM

Nordson Pro Blue 10

### FLAP CLOSING

Servo dust flap tuckers, stainless plows, and controlled stop glue compression.

### COMPRESSION

Timing belt driven compression section

### ELECTRONICS

Allen-Bradley PLC with Panelview Plus color touch screen

### FINISH

Epoxy paint


### COMPONENTS

High volume vacuum system  
Air filter regulator  
Total servo driven components

### INSTALLATION REQUIREMENTS

Power	One drop (480 V.)
Air	One drop 60-80 PSI

## Servo Club Store Packer Can Patterns--

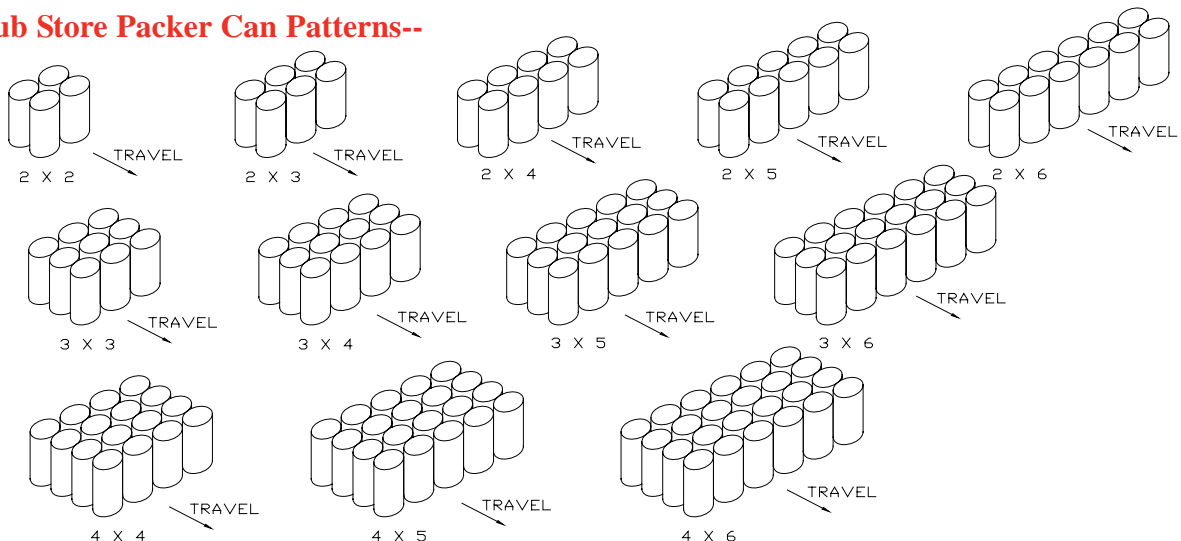

## Thiele Technologies, Inc.

HQ - Minneapolis, MN • Fergus Falls, MN • Fridley, MN • Reedley, CA  
612/782-1200 218/739-3321 763/502-0000 559/638-8484

[www.thieletech.com](http://www.thieletech.com) • [sales@thieletech.com](mailto:sales@thieletech.com)