



## Continuous Motion Multiwrap Sleever WrapStar™ Bottom Seal



### Key Features

- Single or double tier wrap capable of one to sixteen packs
- Handles a wide variety of product shapes
- Up to 250 sleeves per minute depending on configuration
- Multi-axis servo drive system
- Allen-Bradley PanelView HMI
- Full perimeter polycarbonate guarding with radio frequency style guard door switches (category 4)
- Low profile design
- Nordson ProBlue glue system

# Continuous Motion Multiwrap Sleever

## WrapStar™ Bottom Seal

The WrapStar Sleever sets the standard for sleeve packaging productivity utilizing robust construction and multi-axis servo technology.


The starwheel metering system precisely controls product feeding into the infeed transfer section. Next, a legendary Thiele rotary placer accurately places sleeves based upon product presence. Lastly, the unitized sleeve squaring and gluing system produces repeatedly squared sleeved products.

Let Thiele Technologies show you how you can have both higher productivity and higher profits. Thiele offers the highest level of support, from product handling solutions to defining specifications to integration on your line.

### Available Features

- Intermittent motion/continuous motion functionality
- Allen-Bradley Logix Series PLC
- Allen-Bradley multi-axis servo drive system
- Quick change assemblies for product changeover
- Digital readout package
- Low sleeve detection in hopper
- Stainless steel frame
- NEMA 4X washdown electrical construction
- Placer for divider board between product layers
- Non-corrosive product contact surfaces
- Pneumatically activated top hold down rails
- Minimal moving parts to load product

Specifications	
<b>Speed</b>	
Variable to 250 sleeves per minute depending upon package configuration	
<b>Product Size Range</b>	
Length	2" to 10½"
Width	½" to 4"
Depth	4½" to 12"
<b>Drive</b>	
Multi-axis servo	
<b>Infeeds</b>	
Wide range of infeeds available for product orientation	
<b>Sleeve Magazine</b>	
8' Horizontal Standard	
<b>Sleeve Set-Up</b>	
4-Head Rotary Placer	
<b>Glue System</b>	
Nordson	
<b>Electrical Control</b>	
Allen-Bradley Logix Series PLC	
<b>Finish</b>	
Paint standard; stainless steel available	
<b>Installation Requirements</b>	
Power	One drop (specify voltage)
Air	One drop 60-80 PSI

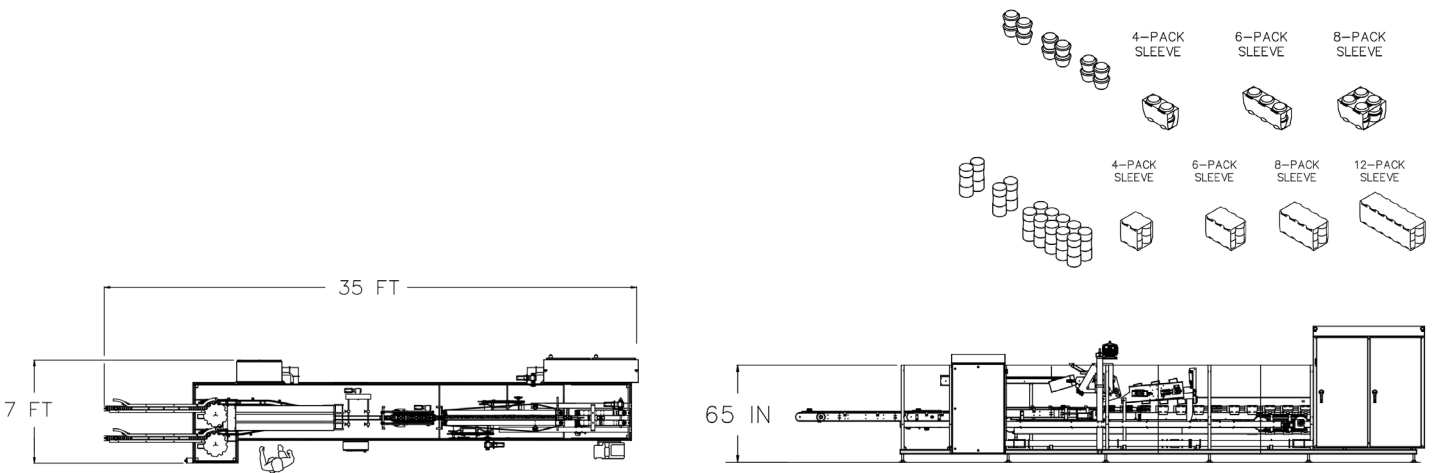

All sales are subject to our prevailing terms and conditions. Illustrations and specifications are subject to change without notice. Machines shown without guards are for illustrative purposes only. Guards are supplied and must be in place before operation.



**Thiele Technologies**

315 27TH AVENUE NORTHEAST | MINNEAPOLIS, MN 55418 USA  
 +1 (612) 782-1200 | WWW.THIELETECH.COM | SALES@THIELETECH.COM