

Intermittent Motion Casepacker Z-Pro 2 Station Casepacker



Key Features

- Small footprint machine specifically designed for applications in all the pharmaceutical and food industries
- Speeds up to 12 cases per minute
- Allen-Bradley Logix Series PLC
- Allen-Bradley PanelView HMI
- Adaptable to handle trays, preglued (RSC) end load cases and wraparound cases
- Nordson hot melt glue system

Intermittent Motion Casepacker

Z-Pro 2 Station Casepacker

The Z-PRO Casepacker is a very compact, flexible, cost-efficient, fully-automatic packer with a speed range of up to 12 cases or trays per minute.

The Z-PRO can produce three types of packaging: trays, preglued (RSC) end-load cases and wraparound cases. All operation are performed in 2 stations on a single level.

With full length access doors and clean balcony design the operator will be able to view the total operation.

Available Models

- Z-Pro: Trays
- Z-Pro: Preglued (RSC) cases
- Z-Pro: Wraparound cases
- Z-Pro: Wraparound cases plus trays


Additional Features

- Demand basis operation allows machine to handle surges
- Touch-screen operator station provides line fault monitoring and diagnostic displays
- Interlocked full length polycarbonate guarding
- PIAB vacuum generator system
- VFD controlled flight chain for accurate case positioning

Optional Features

- UL listed electrical enclosure
- Low case level detection
- Open flap detection
- Plug-in jog cord
- 480 volt electrical power
- Three-color beacon warning
- Servo-driven controlled main flight chain for accurate case positioning
- Stainless steel welded frame
- Quick changeover package
- Sloped lower catch pan with full length guard doors

Specifications	
Pack Dimensions	
Length	4" - 18"
Width	8½" - 24"
Depth	4" - 12"
Machine Dimensions (excluding infeed frame)	
Length	7'6"
Width	3'0"
Depth	7'7"
Weight	Approximately 2500 lbs
Machine Speed	
Up to 12 cases per minute	
Electrical Requirements	
208, 240 or 480 VAC, 3 phase, 60 hz; other electrical requirements available upon request.	
Air Requirements	
1 scf/cycle @ 80 psi	

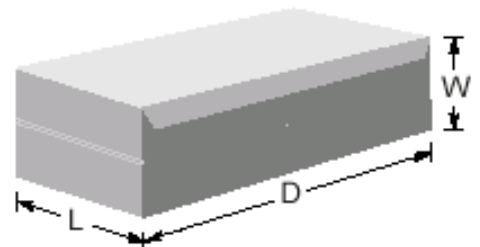

Example of pack dimensions referenced in table

All sales are subject to our prevailing terms and conditions. Illustrations and specifications are subject to change without notice. Machines shown without guards are for illustrative purposes only. Guards are supplied and must be in place before operation.



Thiele Technologies

315 27TH AVENUE NORTHEAST | MINNEAPOLIS, MN 55418 USA
+1 (612) 782-1200 | WWW.THIELETECH.COM | SALES@THIELETECH.COM